

Condensate Neutralizer

AXIOM

NT25



Featuring :

LipHter

7,000,000 Btu/hr
(45 Gal/hr, 170 l/hr)

- Ⓐ NeutraPro prevents acidic condensate from corroding drains and sewer systems
- Ⓐ 18 litre (4.8 US gallon) tank with baffles designed to channel flow through LipHter media for complete neutralization
- Ⓐ Neutralized condensate is more environmentally friendly
- Ⓐ Two 1" NPT inlet/outlet connections with unions for fast and versatile installation
- Ⓐ Low profile design for appliances with near floor condensate drain
- Ⓐ Tank and lid made from durable and corrosion resistant polypropylene
- Ⓐ Integral bypass feature prevents condensate backflow into appliance
- Ⓐ Includes initial charge of Axiom's special LipHter neutralizing media

* Check with the appliance manufacturer for condensate flowrate or go to our website and use the sizing calculator. As a guideline 7,000,000 BTU/hr at 96% efficiency will produce approximately 45 Gal/hr (170 l/hr).

The NT25 “NeutraPro” is ideal for neutralizing condensate from condensing boilers and furnaces operating on natural gas or propane. The condensate produced by these appliances is acidic and has the potential to harm the environment and the sewer system. The “NeutraPro” will neutralize the condensate to a more neutral pH level before it is discharged to drain.


✉ info@axiomind.com
☎ (877)651-1815
🌐 WWW.AXIOMIND.COM

NeutraPro



NT25 Condensate Neutralization Technical Information

DIMENSIONS :

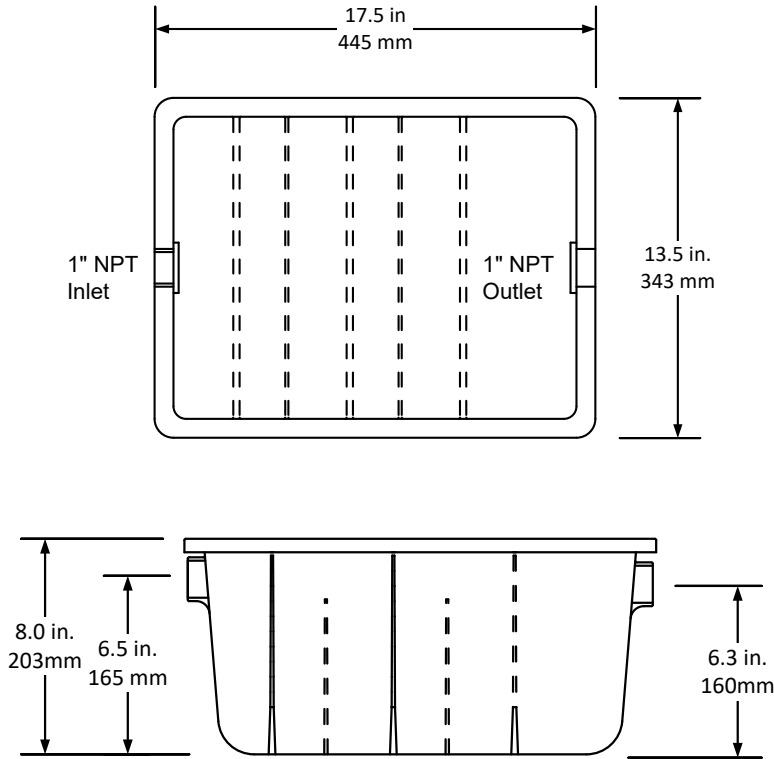

WEIGHT :

20 kg, 45 lbs. (dry weight with Media)

SPECIFICATION :

The condensate neutralization tank shall be AXIOM INDUSTRIES LTD. model NT25. System shall include 18 litre (4.8 U.S. gallon) tank and lid made from polypropylene construction with two 1" FNPT inlet/outlet connections, two 1" NPT PVC unions, two 1" NPT PVC close nipples. Comes with 18 kg (40 lbs) of Axiom's LipHter neutralization media.

OPTIONAL ACCESSORIES :

- NM-25** -- Replacement LipHter neutralization media (Exact Refill)

LIMITED WARRANTY :

The "NT-25" is warranted against defects in materials and workmanship for one year.



Project _____
 Consultant _____
 Unit Tag _____

Location _____
 Contractor _____
 Sales Agent _____