



## SF100-UHP-L HYDRONIC SYSTEM FEEDER TECHNICAL INFORMATION

### **DIMENSIONS :**


**WEIGHT :** 29.4 kg, 65 lbs (Empty)

### **PUMP ELECTRICAL :**

115/60/1, 0.9 amps  
3-prong plug and cord

### **PUMP PERFORMANCE :**

0.09 l/s (1.5 gpm) @ free flow  
0.06 l/s (1.0 gpm) @ 585 kPa (100 psig)  
Self-priming up to 2.1 m (7 feet)  
Maximum liquid temp. 77 C (170 F)

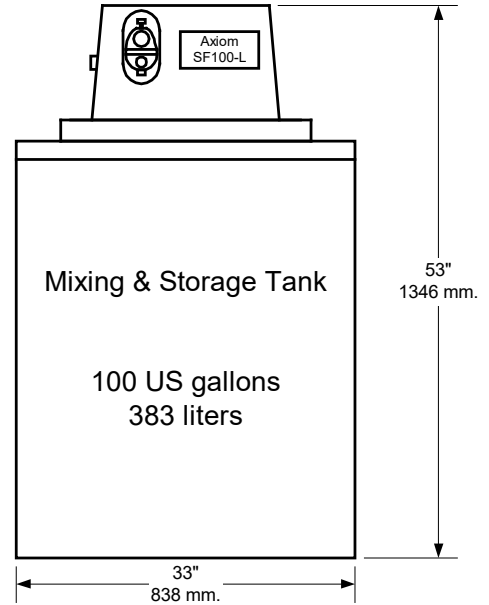

### **SPECIFICATION :**

Hydronic system feeder shall be AXIOM INDUSTRIES LTD. Model SF100-UHP-L. System shall include 383 litre (100 US gallon) storage/mixing tank with cover; pump suction hose with inlet strainer; pressure pump with thermal cut-out; integral pressure switch; integral check valve; cord and plug; pre-charged accumulator tank with Butyl rubber diaphragm; manual diverter valve for purging air and agitating contents of storage tank; pressure regulating valve adjustable (241 – 862 KPa; 35 – 125 psig) complete with pressure gauge; integral replaceable strainer; built-in check valve; union connection; 12 mm (½”) x 900 mm (36”) long flexible connection hose with check valve; low level pump cut-out. Pressure pump shall be capable of running dry without damage. Power supply 115/60/1 0.9 A.

### **OPTIONAL ACCESSORIES :**

- 2PRV** -- Second Pressure Reducing Valve, Pressure Gauge, System Connector Hose and Check Valve to allow for independent pressure supply to a second system.
- RIA10-1-SAA** -- Low level Alarm Panel c/w Remote Monitoring Dry Contacts and Selectable Audible Alarm

### **LIMITED WARRANTY :**

The SF100-UHP-L is warranted against defects in materials and workmanship for one year.

Project \_\_\_\_\_  
Consultant \_\_\_\_\_  
Unit Tag \_\_\_\_\_

Location \_\_\_\_\_  
Contractor \_\_\_\_\_  
Sales Agent \_\_\_\_\_