

Condensate Pump



AP23-S



* Multiple Inlet Connections

* Wall Mountable Hooks



▶ 23' Lift

- | | |
|----------------------------|-----------------------------------|
| ▶ Built-In Wall Mount Tabs | ▶ 3/8" Outlet Connection |
| ▶ Three Inlet Holes | ▶ Corrosion Resistant Material |
| ▶ Quiet Pump Operation | ▶ Stainless Steel Pump Shaft |
| ▶ Low Power Consumption | ▶ 6' Power Cord with Ground |
| ▶ Thermal Safety Switch | ▶ High Level Safety Switch |
| ▶ Removable Check Valve | ▶ Suitable for All HVAC Equipment |

✉ info@axiomind.com

☎ (877)651-1815



🌐 WWW.AXIOMIND.COM





AP23-S Condensate Pump Technical Information

Dimensions :

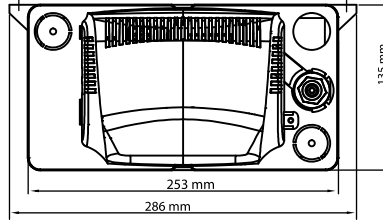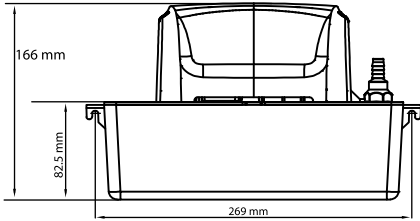

Pump is certified to
CAN/CSA STD
C22.2 no. 108

4007096
Pump conforms to
ANSI/UL STD 778



Weight : 1.93 kg, 4.25 lbs (empty)


Electrical :

Pump: 120VAC 60Hz, 78.4W,
1.38 Amps High level safety
switch rating: 125 or 250VAC
6A, 125V DC 0.4A, 250V DC 0.3A

Pump Performance :

Submerged pump is self-priming
282 L/hr (74 gph) @ free flow
123 L/hr (32 gph) @ 7 m (23ft)

AP23-S Pump Curve

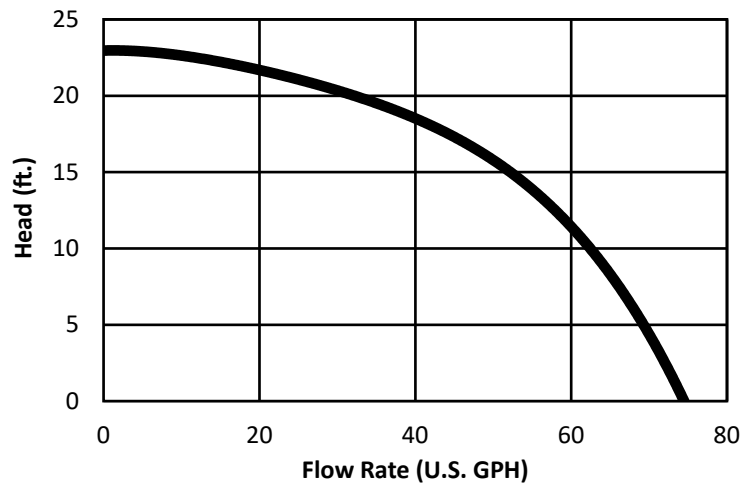

Specification :

The Condensate pump shall be AXIOM INDUSTRIES LTD. Model AP23-S. System shall include 1.8 Liter (0.5 U.S. gallon) tank made and lid made from ABS, pump with thermal cut-out and electrically certified to CAN/CSA STD C22.2 no. 108 conforms to ANSI/UL STD 778; low level float switch; high level float switch with N.C. or N.O. Contacts (factory set to N.C.) for remote alarm system; check valve; 6 ft. long power cord. Power Supply 110/60/1.38A.

Accessories :

RIA10-1-SAA - High level alarm panel provides audible and visual alarm for high level indication.

Limited Warranty :

The “ **AP23-S** ” is warranted against defects in materials and workmanship for two years.

Project Details :

Project _____
Consultant _____
Unit Tag _____

Location _____
Contractor _____
Sales Agent _____

SB-AP23-S-01