

# SYSTEM FEEDER



## SF100-D-P-L

- A Adjustable pressure set point between 5-55 psi
- A Includes **Two** pumps for seamless and reliable operations
- A Alternating Control Panel for lead/lag operation, high level alarm and H/O/A pump switches
- A 100 USG reservoir tank stores (383) liter of fluid
- A No direct connection to potable water supply eliminates need for backflow prevention
- A Feeders are compatible with both water and glycol/water solutions
- A Translucent reservoir provides notice that system may have developed a leak and mitigates potential for flooding disaster
- A Diverter valve allows easy purging of air on initial start-up and manual mixing of fluid in the tank
- A Fluid drained for service from the system can easily be recovered to the tank
- A Fluid level switch shuts pump off if the storage tank level gets too low
- A All units plug into any standard 115 VAC outlet

**5-55 Psi**  
(100 USG)

Axiom System Feeders are designed to simplify the process of maintaining the cold static fluid pressure in closed-loop heating and cooling systems. Having a reservoir of suitable make-up fluid eliminates the need for backflow prevention and helps solve many of the associated problems when using domestic water as a make-up fluid.

✉ info@axiomind.com

☎ (877)651-1815

🌐 WWW.AXIOMIND.COM

PressurePal



## SF100-D-P-L HYDRONIC SYSTEM FEEDER TECHNICAL INFORMATION

### DIMENSIONS :


**WEIGHT :** 61.23 kg, 135 lbs (Empty)

### PUMP ELECTRICAL :

115/60/1, 0.7 amps  
3-prong plug and cord

### PUMP PERFORMANCE :

0.09 l/s (1.4 gpm) @ free flow  
    Combined Flow : 0.18 l/s (2.8 gpm)  
0.06 l/s (1.0 gpm) @ 345 kPa (50 psig)  
    Combined Flow : 0.12 l/s (2.0 gpm)  
Self-priming up to 2.1 m (7 feet)  
Maximum liquid temp. 77 C (170 F)

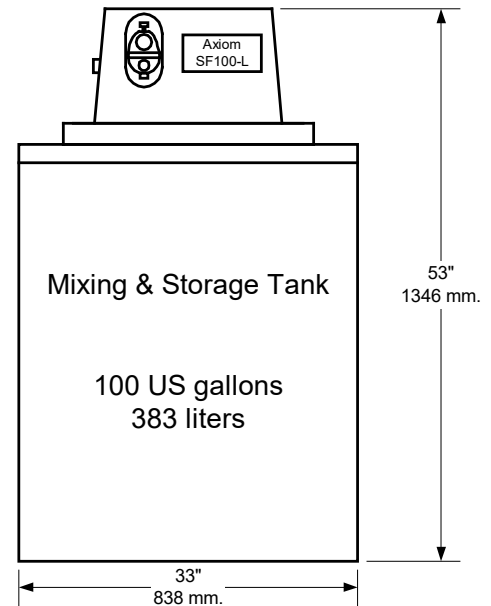

### SPECIFICATION :

Hydronic system feeder and Alternating panel shall be AXIOM INDUSTRIES LTD. Model SF100-D-P-L. System shall include 383 litre (100 US gallon) storage/mixing tank with cover; pump suction hose with inlet strainer; two pressure pumps with thermal cut-out; pump isolation valves; two integral pressure switches; integral check valve; pre-charged accumulator tank with EPDM diaphragm; manual diverter valve for purging air and agitating contents of storage tank; pressure regulating valve adjustable (35 – 380 KPa; 5 – 55 psig) complete with pressure gauge; built-in check valve; union connection; 12 mm (½”) x 900 mm (36”) long flexible connection hose with check valve; low level pump cut-out. Pressure pumps shall be capable of running dry without damage. Power supply 115/60/1 3.8 A. Unit shall be completely pre-assembled and certified by a recognized testing agency to CSA standard C22.2 No 68.

### OPTIONAL ACCESSORIES :

**2PRV** -- Second Pressure Reducing Valve, Pressure Gauge, System Connector Hose and Check Valve to allow for independent pressure supply to a second system.

### LIMITED WARRANTY :

The SF100-D-P-L is warranted against defects in materials and workmanship for one year.

Project \_\_\_\_\_  
Consultant \_\_\_\_\_  
Unit Tag \_\_\_\_\_

Location \_\_\_\_\_  
Contractor \_\_\_\_\_  
Sales Agent \_\_\_\_\_